

Ferrari Tractor CIE


"Appropriate Technology for Agriculture"

P.O. Box 1045
Gridley, CA 95948

(530) 846-6401
FAX (530) 846-0390
www.ferrari-tractors.com

MITSUBISHI COMBINE

VM-7

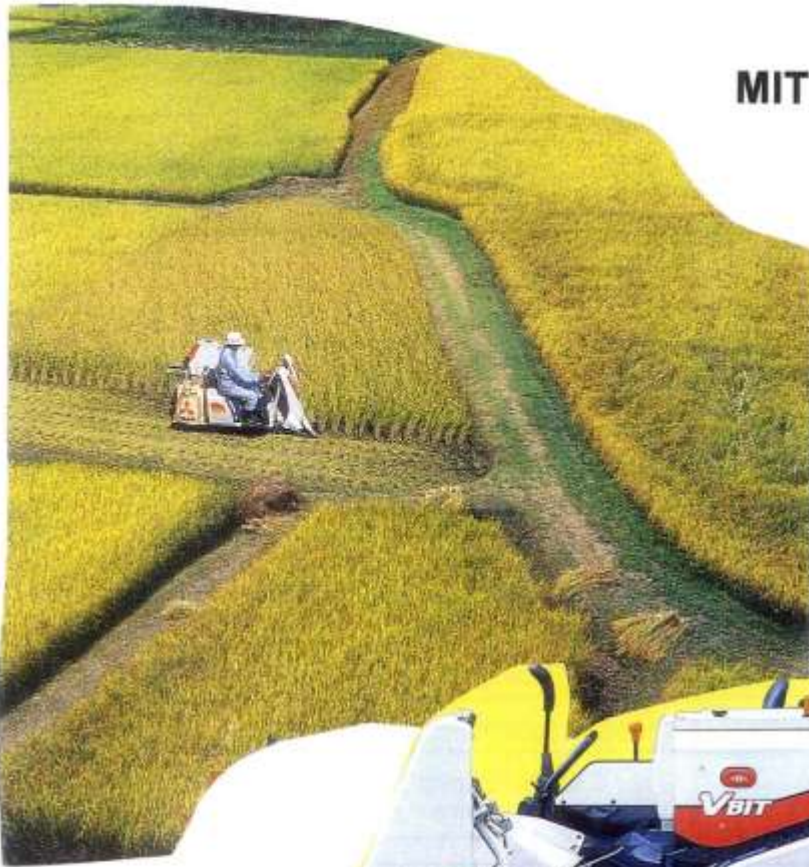

COMPACT , only 7.5' long, 4' wide, 4.3' high and 1000 lbs.
HEAD THRESHING, clean grain delivered to a grain collection bag
RUBBER TRACKS, stability, traction in any condition
TRANSMISSION, 3-speeds and reverse, hydraulic header adjustment
ENGINE, the only 4 cycle, air cooled GAS engine combine we have
REASONABLY PRICED, large combine features at small price and size
DUAL CONTROLS, RIDING OR WALKING, for loading, uneven terrain

Ferrari Tractor CIE

"Appropriate Technology for Agriculture"

P.O. Box 1045
Gridley, CA 95948

(530) 846-6401
FAX (530) 846-0390
www.ferrari-tractors.com

VERSATILE

BEST for harvesting small tracts, wet fields, or uneven ground plots.



DUAL CONTROLS
RIDING OR WALK BEHIND
GREAT FOR LOADING OR
RUGGED FIELDS



Versatile
Maneuverable
Rubber Tracks less compaction
Unleaded Gas Engine
Head Threshing
Grain Raising pick-up Tines, harvest downed or lodged grain



Ferrari Tractor CIE

"Appropriate Technology for Agriculture"


P.O. Box 1045
Gridley, CA 95948

(530) 846-6401
FAX (530) 846-0390
www.ferrari-tractors.com

LARGE COMBINE FEATURES IN A COMPACT MANEUVERABLE COMBINE



Open Access
Easy Clean out

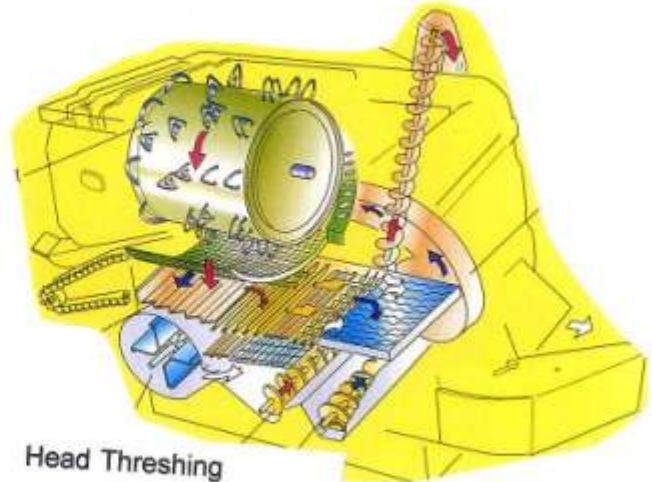

Head Threshing
Clean Grain



Rubber Tracks
Stability



Single Bag
Grain Collection



10 hp Gas
4 cycle Engine

Priced Currently at \$28,000 Fob Portland, Oregon

Ferrari Tractor CIE

"Appropriate Technology for Agriculture"

P.O. Box 1045
Gridley, CA 95948

(530) 846-6401
FAX (530) 846-0390
www.ferrari-tractors.com

MITSUBISHI COMBINE VM - 7

SPECIFICATIONS

Model	VM-7KS
Type	Two Row Riding
Dimensions LxWxH mm feet	2300x1265x1315 7.5'x4.1'x4.3'
Net Wt. kg/lbs	455kg 1003lbs
Gr Weight kg/lbs, approx.	560kg 1235lbs
Engine Model	GM301 10hp
Type	4 cycle, air cooled, unleaded gas, OHV
Starter with On/Off Switch	Battery (Electric) Starter
Ignition	transistor ignition
Transmission Travel Speed mph	Gear Shift, 3 Forward, 1 Reverse F1,.45 - F2,.92 - F3,2.0 R,.45
.Rubber Crawler Tracks	width 9"x27" ground contact length width at center 26"
Header, Cutter Bar Length Gathering Width Height Adjustment	serrating sickle bar" 600mm / 23.6" 700mm / 27.5" Hydraulic
Threshing Axial Flow Drum Separation Cleaning	14.4" Diameter x 13" Length 560 RPM Oscillating Sieve L30.4" x W13.6" Adjustable vanes and winnowing fan
Grain Handling	One Bag at Discharge Spout
Harvesting Capacity	6 Hrs / Acre Approx.

Models, Prices, Specifications subject to change without notice